


APPARATUS FOR MEASURING SECTIONAL SHAPE

Patent number: JP9287926
Publication date: 1997-11-04
Inventor: YAMAMOTO HIKARI
Applicant: HITACHI CONSTRUCTION MACHINERY
Classification:
 - international: G01B11/24
 - european:
Application number: JP19960102519 19960424
Priority number(s): JP19960102519 19960424

Report a data error here

Abstract of JP9287926

PROBLEM TO BE SOLVED: To measure a sectional shape of an object highly accurately, by synthesizing optimum data for every part from a plurality of data obtained under different image pickup conditions, thereby obtaining a sectional image. **SOLUTION:** A cutting line 5 of a body 3 to be detected which is illuminated by a slit beam 2 is photographed by an imaging camera 8. The image is stored in an image memory Mn of an image memory device 10 with a photographed data number of $n=1$ and an aperture value of a lens 6 of Sn. Then, the number (n) is incremented by +1 and (n) pieces of photographed image data with aperture values S1 -Sn are stored in memories M1 -Mn until an input count of photographed image data is reached. Subsequently, a line number (i) in a longitudinal direction of the photographed image data is set to be 1 and a difference Vns between an optimum luminance Vs and a maximum luminance Vn is initialized at a maximum value. The maximum luminance Vn of the number (i) in the memory Mn is obtained to calculate $Vn - Vs$ and $Vn - Vs$. A minimum calculated value is set as an absolute value Vns, and a photographed data number having data of the maximum luminance among the number (i) is selected. After the process, data of the number (i) is copied from the memory Mj to a memory M0, and the number (i) is incremented by +1. When all the lines are processed at an image processing unit 11, data photographed under an optimum aperture condition are synthesized for every line on the memory M0.

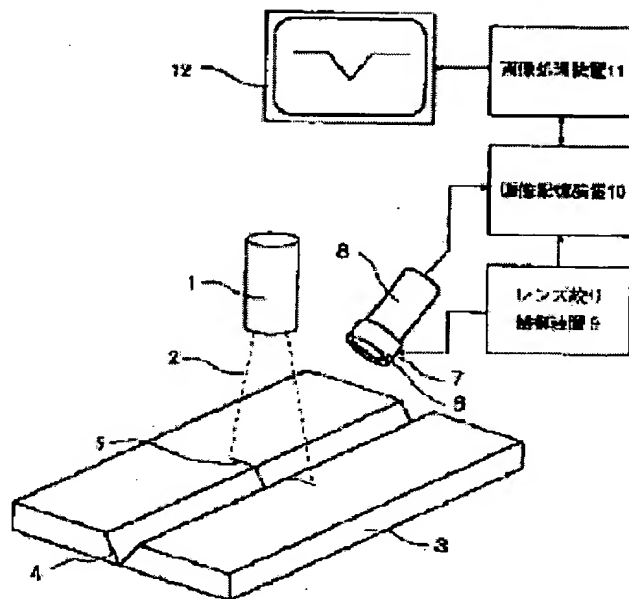

Data supplied from the esp@cenet database - Worldwide

BEST AVAILABLE COPY